




InfiniSolar V

On-grid inverter with energy storage

- ✓ Pure sine wave output
- ✓ Self-consumption and Feed-in to the grid
- ✓ Programmable supply priority for PV, Battery or Grid
- ✓ User-adjustable charging current and voltage
- ✓ Programmable multiple operation modes: Grid-tie (with battery connected), off-grid and grid-tie with backup
- ✓ Monitoring software for real-time status display and control

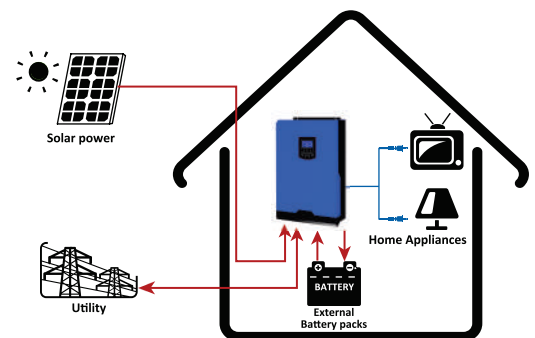



InfiniSolar V

On-grid inverter with energy storage



InfiniSolar V On-Grid Inverter With Energy Storage Selection Guide

MODEL	InfiniSolar V-1K-12	InfiniSolar V-2K-24	InfiniSolar V-3K-48	InfiniSolar V-4K-48	InfiniSolar V-5K-48
Max. PV Array Power	1000W	2000W	4000W	4000W	6000W
Rated Output Power	1000W	2000W	3000W	4000W	5000W
Maximum PV Array Open Circuit Voltage	145 VDC	145 VDC	145 VDC	145 VDC	145 VDC
MPPT Range @ Operating Voltage	15 VDC ~ 115 VDC	30 VDC ~ 115 VDC	60 VDC ~ 115 VDC	60 VDC ~ 115 VDC	60 VDC ~ 115 VDC
MPP Tracker Number	1	1	1	1	2
GRID-TIE OPERATION					
GRID OUTPUT (AC)					
Nominal Output Voltage	220/230/240 VAC				
Output Voltage Range	184 - 264.5 VAC or 195.5 - 253 VAC (Selectable)				
Nominal Output Current	4.3 A	8.7 A	13 A	17.4 A	21.7 A
Power Factor	> 0.99				
EFFICIENCY					
Maximum Conversion Efficiency (DC/AC)	90%				
OFF-GRID, HYBRID OPERATION					
GRID INPUT					
Acceptable Input Voltage Range	90 - 280 VAC or 170 - 280 VAC				
Frequency Range	50 Hz/60 Hz (Auto sensing)				
Maximum AC Input Current	30A		40A		
BATTERY MODE OUTPUT (AC)					
Nominal Output Voltage	220/230/240 VAC				
Output Waveform	Pure sine wave				
Efficiency (DC to AC)	93%				
BATTERY & CHARGER					
Nominal DC Voltage	12 VDC	24 VDC	48 VDC	48 VDC	48 VDC
Maximum Solar Charge Current	80 A	80 A	80 A	80 A	120 A
Maximum AC Charge Current	60 A				
Maximum Charge Current	140 A	140 A	140 A	140 A	180 A
GENERAL					
PHYSICAL					
Dimension, D x W x H (mm)	100 x 300 x 440	100 x 300 x 440	120 x 295 x 468	120 x 295 x 468	190 x 295 x 483
Net Weight (kgs)	8	8	11	11	16
INTERFACE					
Parallel Function	N/A	N/A	Yes	Yes	Yes
External Safety Box (Optional)	Yes				
Communication Ports	USB or RS232/Dry-Contact				
ENVIRONMENT					
Humidity	0 ~ 90% RH (Non-condensing)				
Operating Temperature	0 to 50°C				

Product specifications are subject to change without further notice.



www.serenum.co.uk



support@serenum.co.uk